




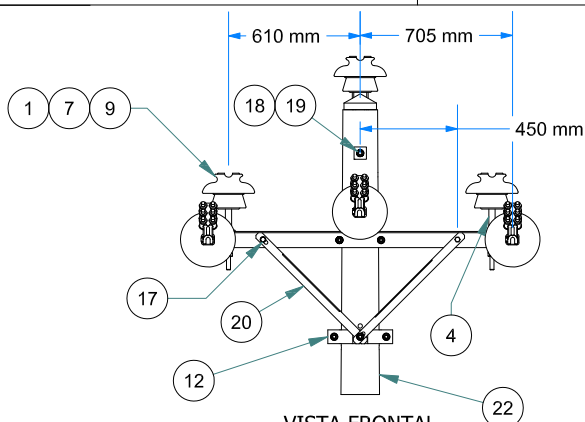


VISTA FRONTAL
ESC: 1 / 35

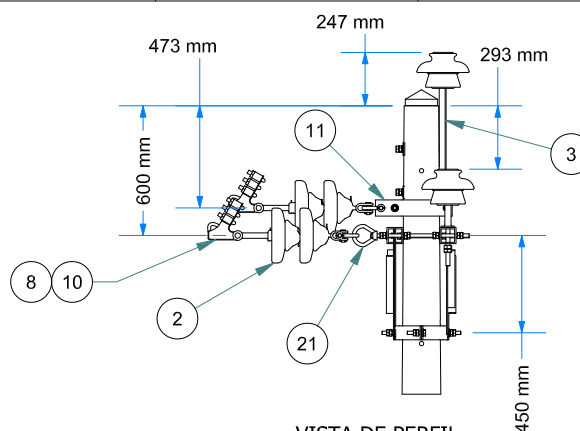

VISTA DE PERFIL
ESC: 1 / 35

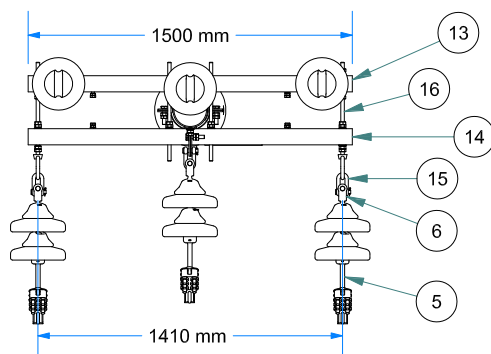

VISTA DE PLANTA
ESC: 1 / 35



VISTA ISOMETRICA
ESC: 1 / 50

GRN	MODIFICADO:
64,139	PESO FERRETERIA (Kg):
46,65	PESO AISLADORES (Kg):

VER: 02	TENSION:	10 kV / 13.2 kV	MT	CONCRETO	MT-AT4-13.2 (CAD)
VERSION:	ELABORADO:	JLGR	NOV-2015	NOV-2015	NOV-2015
ANCLAJE	REVISADO:	JUD	NOV-2015	NOV-2015	NOV-2015
DISEÑO:	CODIGO NIF:	CODIGO SID ELSE:	CODIGO MINE:	IT	COD. ELSE
1	L-P060201	APS03	AISLADOR DE PORCELANA TIPO PIN ANSI 56-2	und.	3
2	L-P070101	ASS01	AISLADOR DE PORCELANA TIPO SUSPENSION 52-3	und.	6
3	L-P130103	AXC05	ESPIGA PARA VERTICE PUNTA DE POSTE L= 609 mm, DR= 35 mm, PARA AISLADOR PIN ANSI 56-3 C/T/C/A/AP	und.	1
4	L-P130204	AXC18	ESPIGA PARA CRUCETA L= 203 + 178 mm, D= 28,6 mm, DR= 35 mm, PARA AISLADOR PIN ANSI 56-3 C/T/C/A/AP	und.	2
5	L-P140301	AXA04	ADAPTADOR CASQUILLO OJO LARGO	und.	3
6	L-P140601	AXA02	ADAPTADOR HORQUILLA BOLA	und.	3
7	L-P150402	CXP12	VARILLA DE ARMAR PREFORMADA SIMPLE DE AL DE 1117 mm, 8 HILOS, PARA CONDUCTOR DE AL 35 mm²	und.	3
8	L-P150701	CXX09	CINTA PLANA DE ARMAR DE ALUMINIO	und.	3
9	L-P150901	CXX05	ALAMBRE DE AMARRE DE ALUMINIO DE 10 mm²	m.	8
10	L-P151001	AXG01	GRAPA DE ANCLAJE TIPO PISTOLA DE DOS PERNOS PARA CONDUCTORES DE SECCIÓN 16 a 50 mm²	und.	3
11	L-P180107	RXA01	ABRAZADERA PARA ARMADO VERTICAL de 75 mm, E= 6,4 mm, D=165 mm C/3P/3T/3C/6A/3AP	und.	1
12	L-P180209	PAA07	ABRAZADERA TIPO CAS DOBLE DE 64 mm, E=6,4 mm, D=170 mm C/4P/4T/4C/8A/4AP	und.	1
13	L-P181020	PCF02	CRUCETA DE PERFIL ANGULAR DE FIERRO GALVANIZADO DE 75x75x1500 mm, E=6,4 mm, DOS DADOS 200 mm	und.	1
14	L-P181040	PCF03	CRUCETA DE PERFIL ANGULAR DE FIERRO GALVANIZADO DE 75x75x1500 mm., E=6,4mm, 2 DADOS 100 mm	und.	1
15	L-P181202	AXA01	GRILLETE DE ANCLAJE TIPO RECTO D=16mm C/PASADOR DE SEGURIDAD	und.	3
16	L-P181804	FPD05	PERNO DOBLE ARMADO 16 mm, L= 457 mm, CR=55kN C/2T/2C/4A/2AP	und.	4
17	L-P182001	FPM01	PERNO MAQUINADO L= 50 mm, D= 13 mm C/T/C/2A/AP	und.	4
18	L-P182014	FPM07	PERNO MAQUINADO L= 203 mm, D= 16 mm C/T/C/2A/AP	und.	2
19	L-P182102	FAC02	ARANDELA CUADRADA CURVA DE 57 x 57 x 5 mm, D= 17,5 mm	und.	2
20	L-P182302	PCB06	RIOSTRA DE PERFIL ANGULAR DE F°G° 38x38x710 mm. E= 5 mm.	und.	4
21	L-P182902	FTO01	TUERCA OJO, D= 16 mm	und.	2
22	L-P010106	PPC16	POSTE DE CONCRETO ARMADO 12/300/160/330 (ó SEGUN REQ.)	und.	1
IT	COD. ELSE	SICODI	DESCRIPCIÓN	UND.	CANT.

LAMINA:

7

ARMADOS TRIFASICOS DE MEDIA TENSION
AT
(0°-30°)